Manage the Internal vPBX Telephone Numbers

Introduzione

Here all vPBX internal telephone numbers can be managed.

The vPBX administrator can:

- ♦ Create and delete internal telephone numbers
- ♦ Edit the subscriber account of the internal telephone number
- ♦ Check the registration status of the VoIP terminals

Contents

- 1 Manage the vPBX Internal Telephone Numbers
 1.1 Create a Numbering Plan for the vPBX
 2 Generating Internal Telephone Numbers
 3 Generate Direct Dialing In DDI
 3.1 Automatic Creation of Direct Dialing In
- - ◆ 3.2 Manual Creation of Direct Dialing In
- 4 Overview of the Registered SIP Devices
- 5 Configuration

 - ◆ 5.1 Where to Configure this Feature
 ◆ 5.2 Creating, Modifying and Deleting Internal Telephone Numbers
 ◆ 5.3 Parameter Configuration
 ◇ 5.3.1 Parametro: Create new Number
 ◇ 5.3.2 Parametro: Template

Manage the vPBX Internal Telephone Numbers

Contrary to the public vPBX telephone numbers the vPBX administrator can manage the internal vPBX phone numbers freely. He can create, edit and delete internal vPBX new phone numbers. A limitation of the number of internal vPBX telephone numbers can be specified by the provider, however.

Nota

When an internal vPBX telephone number will be deleted then the private data of the subscriber will be gone, e.g. messages of the personal voicemail box, announcements, etc.

Create a Numbering Plan for the vPBX

It is recommended that for the vPBX a numbering plan is prepared. The numbering plan outlines the planned/available internal vPBX phone numbers. Ideally, it also describes the direct dialing in from the public to the internal vPBX telephone numbers. Based on the prepared numbering plan the internal vPBX telephone numbers will be generated.

Example of a vPBX numbering plan:

File:Admincenter vpbx numberingplan e10.gif

Example of a vPBX numbering plan

Generating Internal Telephone Numbers

The internal vPBX phone numbers of this numbering plan can be created as described in the chapter "Configuration" below.

For the above numbering plan example the internal vPBX telephone numbers are generated with the following input parameters "Create new Number"

10,11,21-24,30-34

Miglior prassi An internal vPBX telephone number and its prepared and checked account configuration serve as a "Template" for new vPBX subscribers!

For this purpose, first an internal vPBX telephone number must be created with a complete and checked configuration of its subscriber account.

At the generation of further internal vPBX telephone numbers this "template number" can used in parameter "Template". The "template number" subscriber account configurations are copied as far as useful to the new subscriber account.

Generate Direct Dialing In DDI

© Aarenet AG 2017 2/5

Automatic Creation of Direct Dialing In

When new internal vPBX telephone number is created the vPBX tries to create a direct dialing in from a public vPBX phone number to this new internal vPBX telephone number. For doing so the vPBX analyses if the digits of this new internal vPBX telephone number match (from the right) with a public vPBX telephone number.

In the above example this will succeed with the following internal vPBX telephone numbers:

```
      public
      012
      34567
      10
      intern
      10

      public
      012
      34567
      11
      intern
      11

      public
      012
      34567
      21
      intern
      21

      public
      012
      34567
      22
      intern
      22

      public
      012
      34567
      23
      intern
      23

      public
      012
      34567
      24
      intern
      24
```

A direct dialing in can be changed at any time. This proceeding is described on page "The Public vPBX Telephone Numbers and Direct Dialing In DDI".

Manual Creation of Direct Dialing In

The configuration of a direct dialing in can be done manually at any time. This proceeding is described on page "The Public vPBX Telephone Numbers and Direct Dialing In DDI".

From the above example, the following direct dialing in has to be done manually:

```
public 012 34567 77 intern 30
```

Overview of the Registered SIP Devices

The column "Registration" in the list of the internal vPBX phone numbers shows if SIP device are registered. A green dot indicates that at least one SIP device has registered itself to the internal vPBX number.

The details of a registration can be examined via the following navigation:

```
Tab "Subscriber xx"
Tab "Settings"
Tab "Phones"
Click button [ State ? ]
```

© Aarenet AG 2017 3/5

Configuration

Where to Configure this Feature

As vPBX administrator:

Tab "Intern"

Creating, Modifying and Deleting Internal Telephone Numbers

Setting up a new internal vPBX telephone number:

- Insert one or more new telephone numbers in the input box beside the Pulsante [+ Create new Number].
 Examples:
 - · Single number: 30
 - · Several single numbers: 30,41,52
 - Number range: 60-65
 - · Combination: 30,41,52,60-65,70,800-850
- 2. In parameter "Template" an internal telephone number can be selected whose subscriber account configuration is copied as far it is appropriate.
- Click Pulsante [+ Create new Number]

Note:

In the popping up dialogue, the newly to create telephone numbers can be checked and by clicking Pulsante [Yes] these new internal vPBX telephone numbers and their associated subscriber accounts will be generated.

4. For saving the configurations click the Pulsante [Save]

Modify an existing an internal telephone number:

1. Click the row of the desired internal telephone number.


Note:

The AdminCenter GUI changes automatically to the tab "Subscriber xx" (xx stands for the internal telephone number). The vPBX administrator can then make all the settings for this internal subscriber account.

2. For saving the configurations click the Pulsante [Save]

Delete an internal telephone number:

1. Click the icon at the end of the row of the desired internal telephone number.

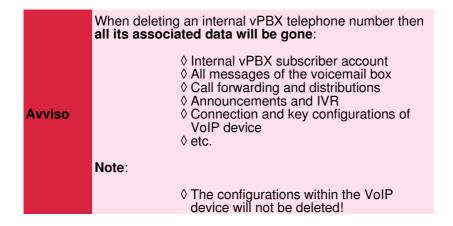

© Aarenet AG 2017 4/5

Parameter Configuration

Parametro: Create new Number

Descrizione:	Defines one or more internal telephone numbers to be generated. The associated internal subscriber account will also be created.
	Examples of input options:
	 Single number: 30 Several single numbers: 30,41,52 Number range: 60-65 Combination: 30,41,52,60-65,70,800-850
Configurazione:	Pulsante [+ Create new Number]
	Stringa di configurazione:
	♦ Comma separated list of one or more phone numbers and/or number ranges
Predefinito:	None
Versione:	AdminCenter V5.7

Parametro: Template

Descrizione:	Defines the subscriber account configuration of an existing internal vPBX phone number as the basis for new internal phone number.
	At the generation of new internal telephone numbers the default configuration is copied as far it is appropriate.
Configurazione:	Menu di scelta:
	Default List of all available internal telephone numbers
Predefinito:	Default
Versione:	AdminCenter V5.9

© Aarenet AG 2017 5/5